

# Torsion Axle Order Form

Your Company & Phone Number: \_\_\_\_\_

Your name: \_\_\_\_\_

Ship Via: \_\_\_\_\_

Sign here for approval of order: \_\_\_\_\_

Stud Size (Please check one)

1/2      7K Only:  9/16     5/8



## Choose a Hub (IF REQUIRED)

Bolt Centers

4"    4-1/2"    4-3/4"    5"    5-1/2"    6-1/2"    9.44"



## Required Information

Axle Mount  Bolt On     Weld On

A – Main Rail: Outside to Outside: \_\_\_\_\_

B – Hub Face to Hub Face: \_\_\_\_\_

C – Mounting Bolt Center: \_\_\_\_\_

D – Torsion Arm to Hub Face: \_\_\_\_\_

E – Torsion Arm Length:  
(Axle center to spindle center): \_\_\_\_\_

(STANDARD SIZE IS 4.5" - All others are special order)

Axle Quantity: \_\_\_\_\_


Axle Capacity: \_\_\_\_\_

Axle Type:     Brakes     Idler     Bare (choose one)


Electric     Hydraulic (choose one)

Mount Format:  Side Mount     Top Mount (choose one)  
(See diagram below)

Quantity Required: \_\_\_\_\_

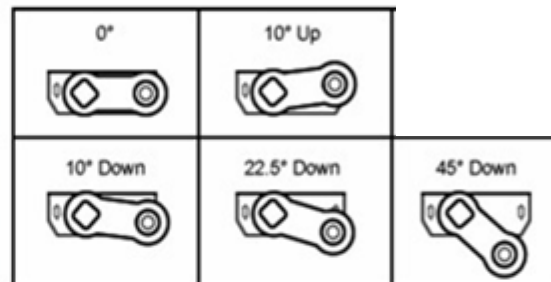


Axle Degrees \_\_\_\_\_ :  Up     Down (choose one)



Mounting Bracket Directions: (choose one)

Inboard (Standard)  
 Outboard (Reverse)

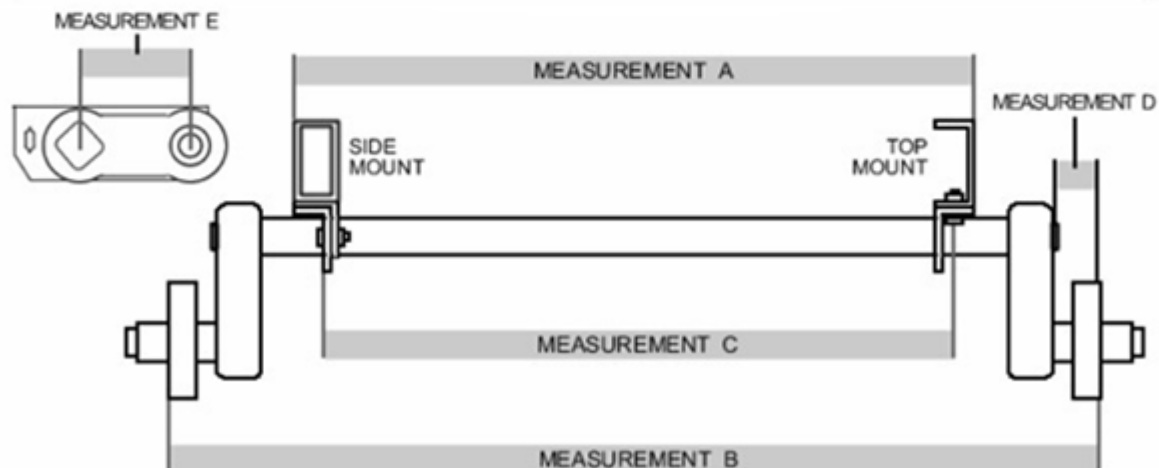

## Special Notes:

- The Max. and Min. length between the hub face and outside mounting brackets is: Max. = 19.9", Min. = 9.5"
- Minimums are based on mfg. tolerances only. Some tire and wheel combinations may create interference
- Due to manufacturing differences, some adjustment may be required in mounting

Fill out this form and fax it to us at (604) 530-7698